



Spring isolator FR-E-56-()-A

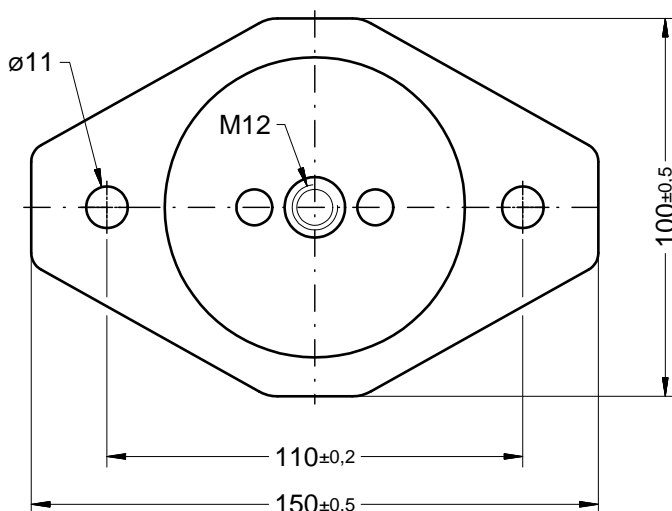

Applications

- isolation of rotating machines operating above 600 min^{-1}
- e.g. fans, motors, pumps, compressors, cooling units ...

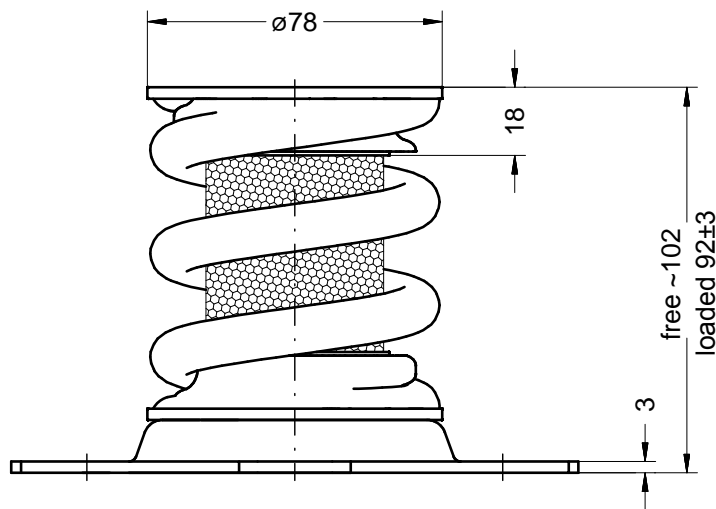

Description

- fixing plate of steel, zinc coated
- spring of spring wire, coated black
- damping cushion of stainless steel wire
- scrolls of Al-alloy
- vertical resonant frequency: 5 - 6 Hz
- weight: 0,9 - 1,5 kg according to type
- elastic limit load:
2 g vertical 0,5 g horizontal

type	load
FR-E-56- 50-A	30 - 50 daN
FR-E-56- 80-A	50 - 80 daN
FR-E-56-130-A	80 - 130 daN
FR-E-56-200-A	130 - 200 daN
FR-E-56-300-A	200 - 300 daN
FR-E-56-400-A	300 - 400 daN