



Spring isolators FR-E2-79

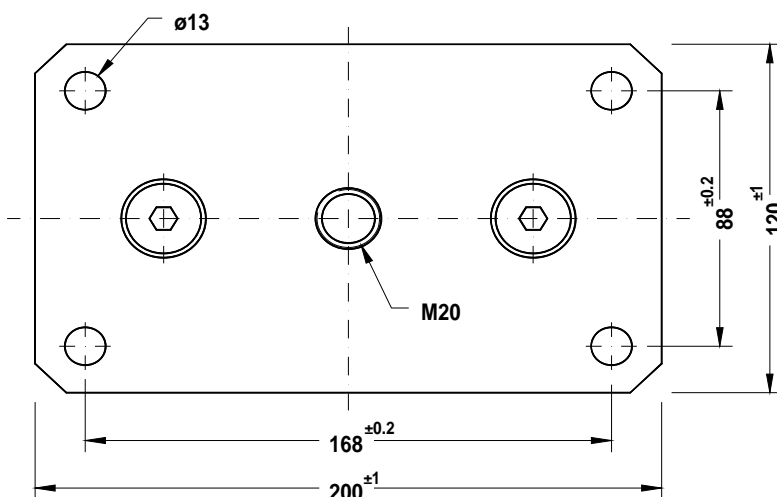

Applications

- Resilient suspension of rotating machines with rotational speed of > 800 rpm , i.e. ventilators, motors, blowers, pumps, air conditioner, test stands, compressors, scales etc.

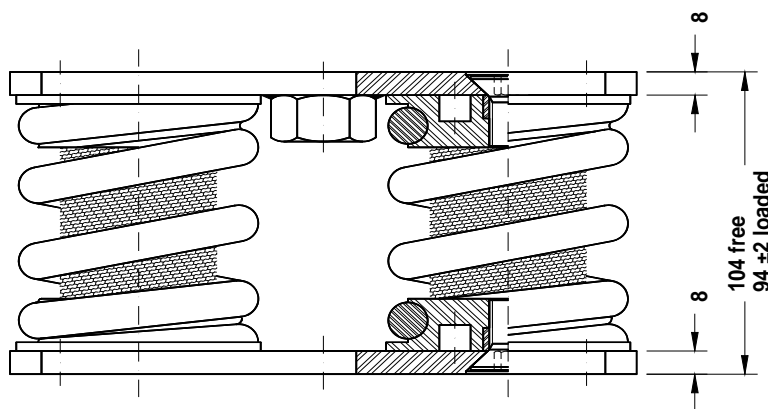

Description

- Steel mounting plates, zinc coated
- Springs made of spring steel wire, black coated
- Damping cushion of stainless steel wire
- Spring end caps of Al-alloy
- Vertical natural frequency: 7 - 9 Hz
- Weight: 4,5 - 5,7 kg depending on type
- Elastic max. load:
4 g vertical 0,5 g horizontal

Type	Load
FR-E2-79- 180	80 - 180 daN
FR-E2-79- 260	120 - 260 daN
FR-E2-79- 380	220 - 380 daN
FR-E2-79- 540	340 - 540 daN
FR-E2-79- 800	500 - 800 daN
FR-E2-79-1100	700 - 1100 daN