



Spring isolators

FR-E4-34



Applications

- Resilient suspension of rotating machines with rotational speed of > 400 rpm, i.e. ventilators, motors, blowers, pumps, air conditioner, test stands, compressors, scales etc.

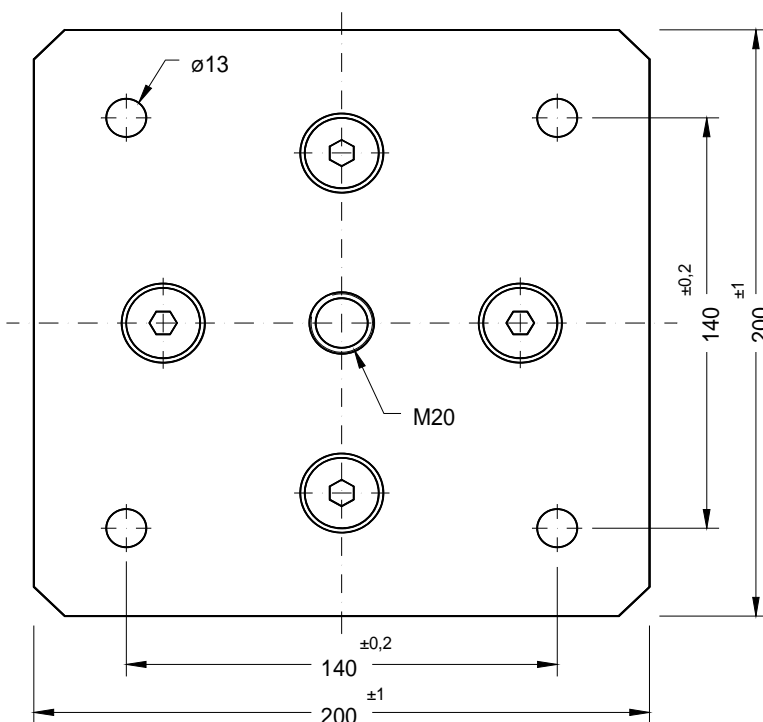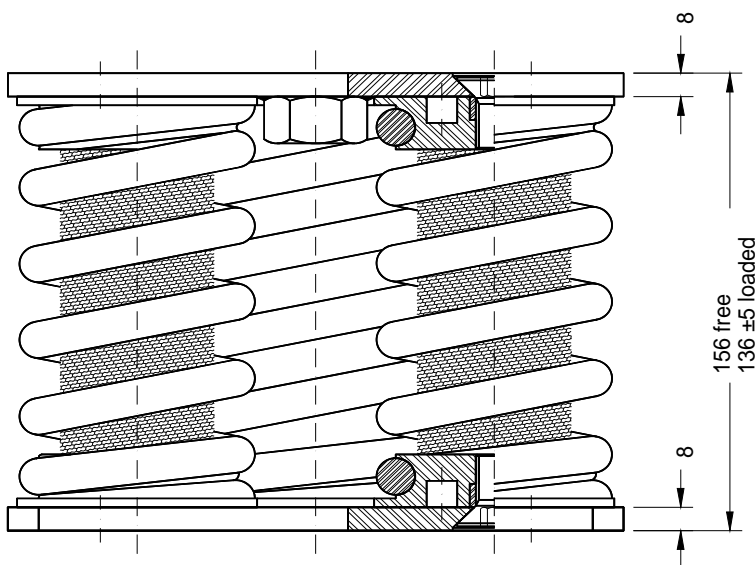

Description

- Steel mounting plates, zinc coated
- Spring made of spring steel wire, black coated
- Damping cushion of stainless steel wire
- Spring end caps of Al-alloy
- Vertical natural frequency: 3 - 4 Hz
- Weight: 8,3 - 11,8 kg depending on type
- Elastic max. load:
1,5 g vertical 0,5 g horizontal

Type	Load
FR-E4-34- 400	280 - 400 daN
FR-E4-34- 520	360 - 520 daN
FR-E4-34- 640	440 - 640 daN
FR-E4-34- 920	640 - 920 daN
FR-E4-34-1240	880 - 1240 daN
FR-E4-34-1640	1200 - 1640 daN