



Spring isolators FR-E4-56

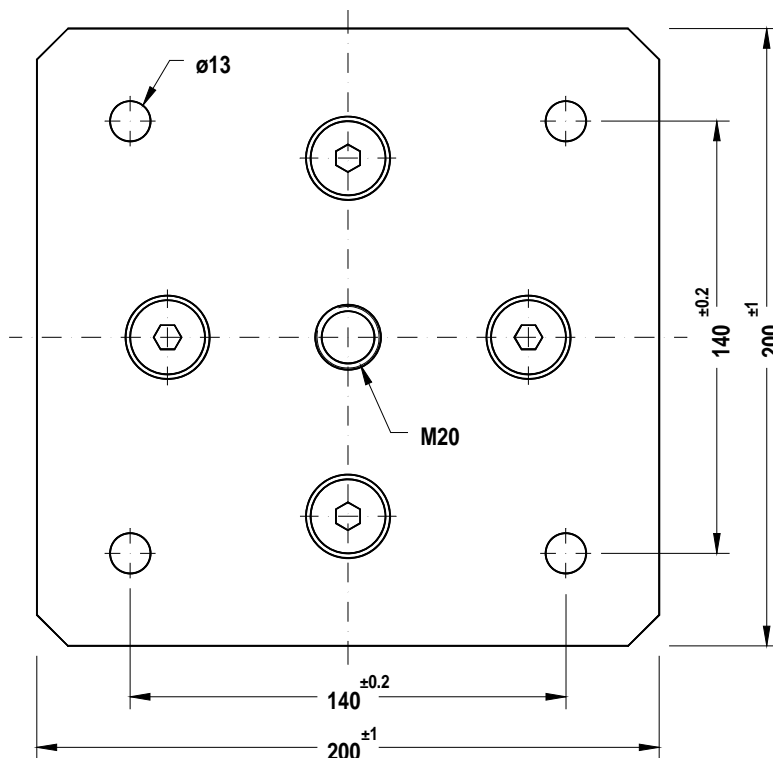

Applications

- Resilient suspension of rotating machines with rotational speed of > 600 rpm, i.e. ventilators, motors, blowers, pumps, air conditioner, test stands, compressors, scales etc.

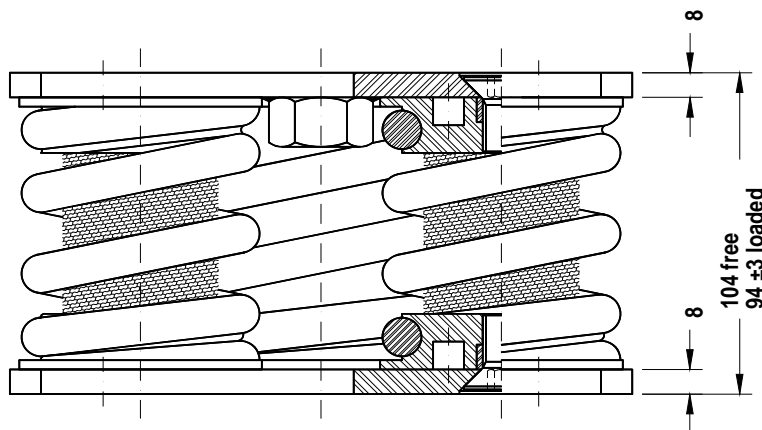

Description

- Steel mounting plates, zinc coated
- Springs made of spring steel wire, black coated
- Damping cushion of stainless steel wire
- Spring end caps of Al-alloy
- Vertical natural frequency: 5 - 6 Hz
- Weight: 7,5 – 9,8 kg depending on type
- Elastic max. load:
2 g vertical 0,5 g horizontal

Type	Load
FR-E4-56- 200	120 - 200 daN
FR-E4-56- 320	200 - 320 daN
FR-E4-56- 520	320 - 520 daN
FR-E4-56- 800	520 - 800 daN
FR-E4-56-1200	800 - 1200 daN
FR-E4-56-1600	1200 - 1600 daN