


# Spring isolators

## FR-E4-79




### Applications

- isolation of rotating machines operating above 800 min<sup>-1</sup> such as fans, motors, pumps, air conditioning sets, compressors, scales ...

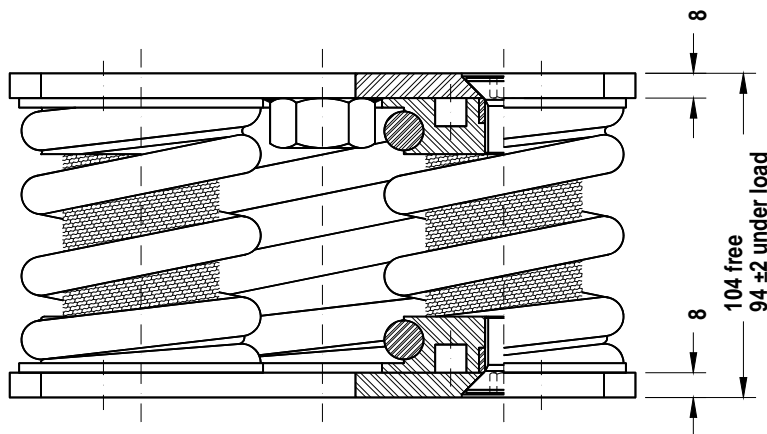

### Description

- top and bottom fixing plate of steel zinc coated
- spring of spring wire coated black
- damping cushion of stainless steel wire
- scrolls of Al-alloy
- vertical resonant frequency: 7 - 9 Hz
- weight: 8,3 - 10,6 kg according to type
- elastic limit load:  
4 g vertical      0,5 g horizontal

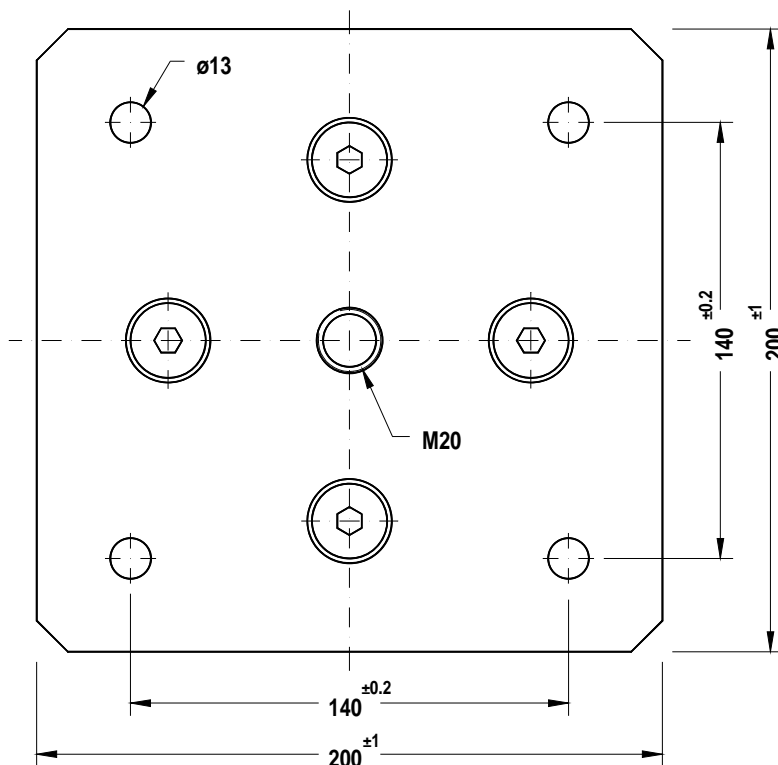

type	load
FR-E4-79- 360	160 - 360 daN
FR-E4-79- 520	240 - 520 daN
FR-E4-79- 760	440 - 760 daN
FR-E4-79-1080	680 - 1080 daN
FR-E4-79-1600	1000 - 1600 daN
FR-E4-79-2200	1400 - 2200 daN